

Flexi Extractor Crane 4•5•6•7•8•9 m D.160/200 mm

Takes care of large Areas


The Flexi Extractor crane is specially developed for welding, mixing of chemicals, grinding etc., when you need to reach over long distances (up to 9 m working radius).

Ball-bearing articulated Support Arm and Parallelogram Technology

The horizontal support arm is extremely flexible due to the Plymoth well tested ball-bearing and disc-brake system. The horizontal arm can carry 60 kg. The extractor hood is incredibly easy to move thanks to modern parallelogram technology.

30 Years Experience!

30 years experience of design and manufacturing at your service. The Plymoth products are a combination of well proven technique and progressive new ideas.

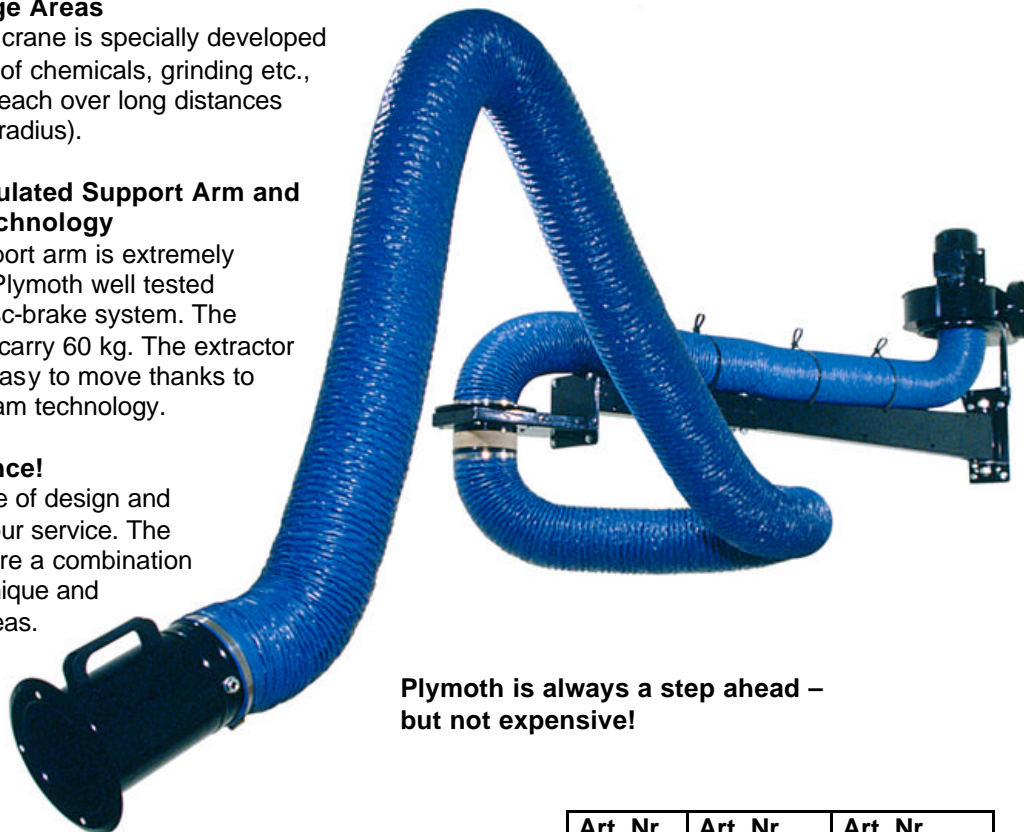

Plymoth is always a step ahead –
but not expensive!

	Art. Nr.	Art. Nr. d.160 mm	Art. Nr. d.200 mm
Flexi Extractor Crane 4 m (2 m+2 m)		P-104	P-105
Flexi Extractor Crane 5 m (2 m+3 m)		P-034	P-162
Flexi Extractor Crane 6 m (2 m+4 m)		P-036	P-173
Flexi Extractor Crane 7 m (2 m+5 m)		P-039	P-175
Flexi Extractor Crane 5 m (3 m+2 m)		P-035	P-172
Flexi Extractor Crane 6 m (3 m+3 m)		P-037	P-163
Flexi Extractor Crane 7 m (3 m+4 m)		P-040	P-164
Flexi Extractor Crane 8 m (3 m+5 m)		P-042	P-177
Flexi Extractor Crane 6 m (4 m+2 m)		P-038	P-174
Flexi Extractor Crane 7 m (4 m+3 m)		P-041	P-176
Flexi Extractor Crane 8 m (4 m+4 m)		P-043	P-165
Flexi Extractor Crane 9 m (4 m+5 m)		P-044	P-166
Fan bracket with turning flange		P-045	P-151
Fan P-Max 1300 / 0.37 kW / 3-Phase	P-011		
Fan P-Max 2100 / 0.75 kW / 3-Phase	P-012		
Fan P-Max 2100 TURBO / 0.75 kW / 3-Phase	P-013		
Fan P-Max 2100 TURBO / 0.75 kW / 1-Phase 220 Volt	P-015		
Accessories: see leaflet "Accessories,"			

J. Plymoth AB – Trarydsallén 4E, 287 87 Traryd, Sweden.

Tel. +46 40 70015 · Fax. +46 40 30 26 92 · E-mail: info@plymoth.com · www.plymoth.com