


## V-Max Central fans 1300 • 2100 • 3000 • 4600 m<sup>3</sup>/h

The Plymoth V-Max central fans are designed specially for smoke, gas and lighter dust. Our fans are made of heavy steel plate and come complete with stands for mounting on floors, walls or ceilings.

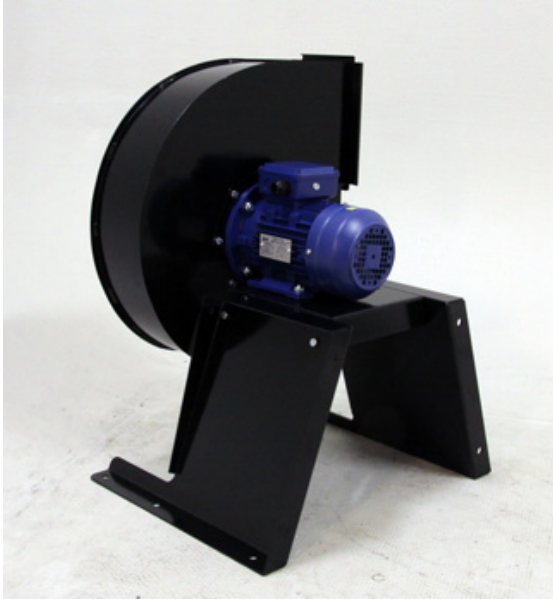

### Energy savings for welding operations Automatic Damper S-Max<sup>©</sup>

An extraction system with a central fan unit can be equipped with an Automatic damper S-Max to save energy when welding. One damper per extractor is needed. The damper automatically starts working when the welding starts and operates only during the arc time. The amount of extracted hot air can be reduced up to 90 percent. A substantial saving!

	Art. No.
<b>Central Fan V-Max 1300</b> 0.37kW / 3-phase with support for floor/wall/ceiling mounting.	P-131
<b>Central Fan V-Max 2100</b> 0.75kW / 3-phase with support for floor/wall/ceiling mounting.	P-132
<b>Central Fan V-Max 3000</b> 1.1kW / 3-phase with support for floor/wall/ceiling mounting.	P-133
<b>Central Fan V-Max 4600</b> 2.2kW / 3-phase with support for floor/wall/ceiling mounting.	P-134

**J. Plymoth AB – Carlsgatan 12A, 211 56 Malmö, Sweden**  
Tel. +46 40 70015 · Fax. +46 40 30 26 92 · E-Mail: [info@plymoth.com](mailto:info@plymoth.com) · [www.plymoth.com](http://www.plymoth.com)