


ORIGINAL Plymoth®

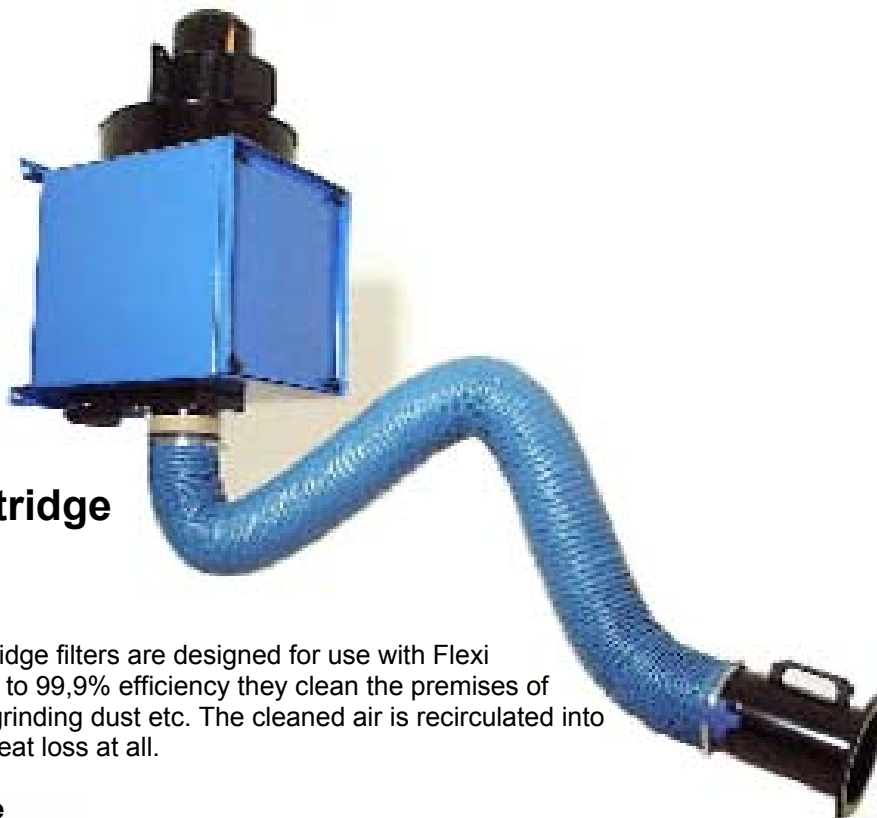

Wall-Flex Cartridge Filter

Dust and Fumes

Plymoth Wall-Flex cartridge filters are designed for use with Flexi extractor arms. With up to 99,9% efficiency they clean the premises of welding fumes, lighter grinding dust etc. The cleaned air is recirculated into the premises, with no heat loss at all.

Replaceable Cartridge

Filtration of pollutants is carried out in two stages. Access to the maintenance-free, replaceable cartridge filter is easy and changing it takes just a couple of minutes. An activated carbon filter for gases is also available. A carbon filter holder is then needed (P-085).

Wallbracket and Fan

Wall-Flex is as standard equipped with a strong wallbracket. The fan is to be mounted on the top side and Flexi extractor arms 1,5-3 m on the bottom side of the filter box (wallbracket fits). Wall-Flex can be connected to a central extraction system.

	Art. Nr.	Art. Nr.	Art. Nr.
		d.160 mm	d.200 mm
Wall-Flex filter box with. 14 m ² filter cartridge	P-026		
Fan P-Max 2100 TURBO / 0.75 kW / 3-Phase	P-013		
Fan P-Max 2100 TURBO / 0.75 kW / 1-Phase 220 Volt	P-015		
Replacement filter cartridge 14 m ²	P-160		
Holder for activated carbon filter	P-085		
Activated carbon filter for WF. 10 pcs.	P-107		
Flexi Minor 1.5 m. Wallbracket incl.		P-006	P-142
Flexi Major 2 m. Wallbracket incl.		P-007	P-143
Flexi Major 3 m. Wallbracket incl.		P-008	P-144
<i>Accessories: see leaflet "Accessories,"</i>			

J. Plymoth AB – Carlsg. 12A, 211 20 Malmö, Sweden.

Tel. +46 40 70015 · Fax. +46 40 30 26 92 · E-Mail: info@plymoth.com · www.plymoth.com